



DELTAQ

for QUATTRO-G3D

Dual frequency satellite-based four-antenna system DELTAQ is based on our TRIUMPH Technology implemented in our TRIUMPH Chip. For the first time in the GNSS history we offer up to 100 Hz RTK. The dual frequency code and carrier data from four antennas are processed to determine the three orientation angles and three dimensional position up to 100 times per second.

216 channels of single or dual frequency GPS, Gallileo and GLONASS in a small attractive, sturdy, and watertight box, which contains Quattro-G3D board.

The on-board power supply on the DELTAQ receiver accepts any voltage from +4.5 to +35 volts and delivers clean filtered voltage where needed. This eliminates the risk of power contamination (ripples) that can be created when clean power is generated elsewhere and delivered to the board via cables. The DELTAQ receiver also includes TriPad (two LEDs, ON/OFF and function button). In addition, the receiver comes with large amount of flash for data storage. The CAN interface in DELTAQ receiver is provided complete with all associated hardware and firmware, not just the CAN bus. The same is true with all the serial RS232/RS422 ports in our receiver. Simply stated, additional functions are not needed to incorporate any of our DELTAQ receiver in most applications.


In addition to timing strobe and event marker, the DELTAQ receiver includes the option of complete IRIG timing system, 1PPS level converter (4V on 500ohm load), and External Reference Output Frequency Converter (5/10/20MHz with tunable signal level from -2dBm to 13dBm).

Standard Configuration

- Memory 0 MB
- GPS L1/L2/L2C,
- GLONASS L1/L2
- Galileo E1
- RAIM
- TriPad Interface
- RS232 Serial Port (460.8 kbps)
- External GNSS Antenna TNC Female connector

Optional Feature

- Update Rate 1 Hz, 5Hz, 10Hz, 20Hz, 50Hz & 100Hz
- RTK Rate 1 Hz, 5Hz, 10Hz, 20Hz, 50Hz & 100Hz
- Data Recording up to 2048MB
- Multi-Base Code Differential Rover
- Code Differential Base
- Advanced Multipath Reduction
- Two Event Markers
- Two 1 PPS timing strobes
- 1 PPS level converter (0 to 4V on 500hm load)
- CAN 2.0 port
- External Reference Frequency input/output
- External Reference Output Converter (5/10/20MHz, -2dBm to +13dBm, step 1dB)
- Up to 3 high Speed (460.8kbps) RS232 Serial Ports
- High speed RS422 serial port (up to 460.8kbps)
- USB port
- Ethernet
- KFK WAAS/EGNOS (SBAS)

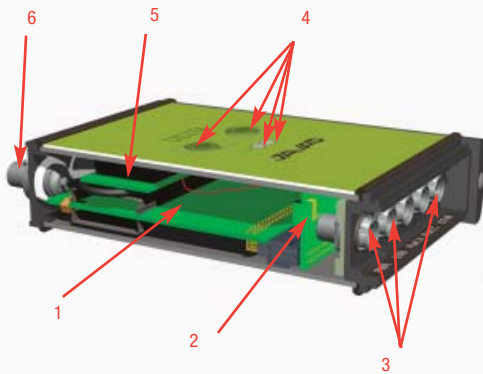

1. GNSS Receiver with on-board Memory
2. GNSS Interconnect Board
3. Communication and Power Ports
4. On/Off and Function Buttons and LEDs
5. Reference Converter Board
6. External GNSS Antenna Connector

Specifications are subject to change without notice.

Description

Total 216 channels: all-in-view (GPS L1/L2/L2C, Galileo E1, GLONASS L1/L2, SBAS) integrated receiver, rugged aluminum housing complete with TriPad interface

Tracking Specification

Tracking Channels	1x (GPS L1/L2/L2C, Galileo E1, GLONASS L1/L2, SBAS)+ 3x (GPS L1/L2/L2C, Galileo E1, SBAS)
Signals Tracked	L1/L2 C/A and P Code & Carrier

Performance Specifications

Autonomous	<2 m
Static, Fast Static Accuracy	Horizontal: 0.3 cm + 0.5 ppm * base_line_length Vertical: 0.5 cm + 0.5 ppm * base_line_length
Kinematic Accuracy	Horizontal: 1 cm + 1 ppm * base_line_length Vertical: 1.5 cm + 1.5 ppm * base_line_length
RTK (OTF) Accuracy	Horizontal: 1 cm + 1 ppm * base_line_length Vertical: 1.5 cm + 1.5 ppm * base_line_length
DGPS Accuracy	< 0.25 m Post Processing, < 0.5 m Real Time
Real time attitude accuracy	Heading ~ 0.004/L [rad] RMS, where L is the antenna separation in [m]
Cold Start	<35 seconds
Warm Start	<5 seconds
Reacquisition	<1 second

Power Specification

Battery	External
External Input Voltage	+4.5 to +35 volts
Power Consumption	

GNSS Antenna Specifications

GNSS Antenna	External
--------------	----------

Radio Specifications

Type	External, UHF/VHF radio modem
Base Power Output	2.0W/35W

I/O

External Power port	1 port
Communication Ports	3x serial RS232 port up to 460.8 kbps High speed RS422 serial port (up to 460.8 Kbps) High speed USB 2.0 device port (480 Mbps) Full-duplex 10BASE-T/100BASE-TX Ethernet port CAN
Other I/O Signals	2x 1 PPS synchronized 2x Event Marker IRIG External Reference Output Converter
Status Indicator	Two LEDs, two function keys (TriPad)

Memory & Recording

Internal Memory	Up to 2048MB of onboard non-removable memory for data storage
Raw Data Recording	Up to 100 times per second (100Hz)
Data Type	Code and Carrier from GPS L1/L2/Galileo E1/GLONASS L1/L2 (Q-G3D)

Data Output

Real time data outputs	RTCM SC104 versions 2.x and 3.x Input/Output
ASCII Output	NMEA 0183 versions 2.x and 3.0 Output
Output Rate	Code and Carrier

Environmental Specifications

Enclosure	Aluminum extrusion, waterproof IP66
Operating Temperature	-40° C to +80° C
Storage Temperature	-45° C to +85° C
Humidity	95% non-condensing
Dimensions	W: 109 mm x H: 35 mm x D: 141 mm/ max 160 mm with connectors
Weight	454 g



JAVAD GNSS

www.javad.com

Rev.1.2 October 12, 2009